



Time Keeper

Countdown² User Manual





28 High Street
Arlesey
Bedfordshire
SG15 6RA
UK
Tel: +44 (0) 870 770 8088
Fax: +44 (0) 870 770 8089
Email: moreinfo@interspaceind.com
www.interspaceind.com



Cueing and Presentation Control Specialists



CountDown² Operation and Programming Diagram

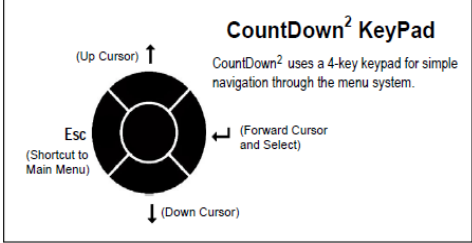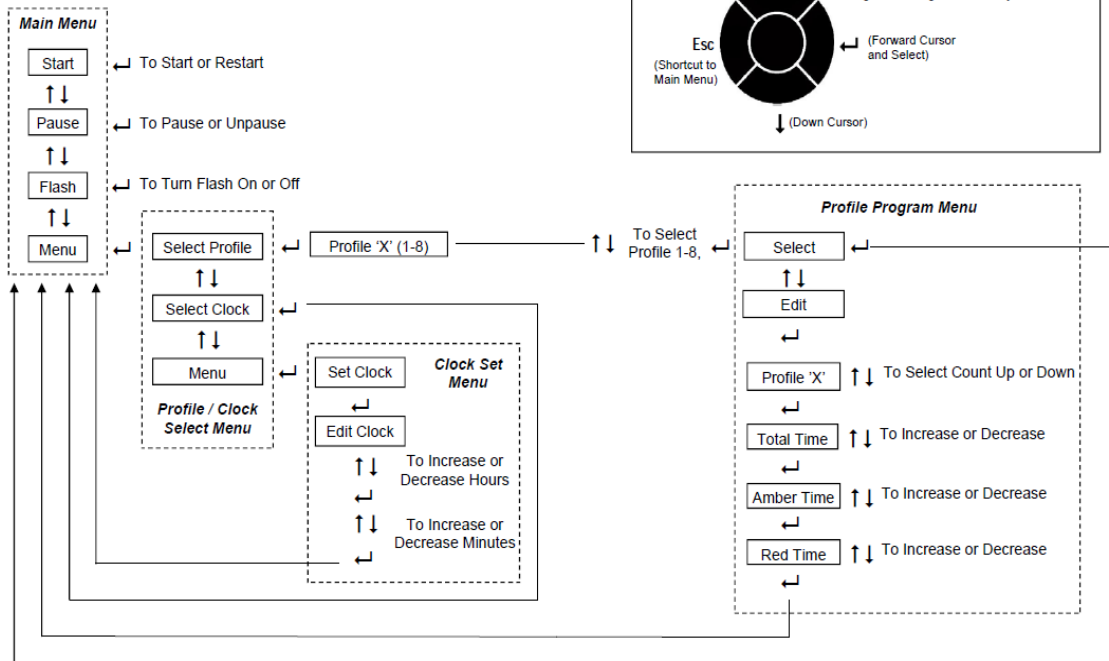

Safety Instructions

All safety and operating instructions should be read before this product is operated and should be retained for further reference. Please adhere to all the warnings on this product and in these operating instructions. Please follow these instructions carefully.

Power. Only use the power source indicated on the device. Devices equipped with a grounded plug should only be used with a grounded type outlet. In no way should this grounding be disconnected, modified or suppressed.

Power Supply Lead. To unplug the device always pull by the plug itself, not the power supply lead. The power source outlet should always be near the MasterCue main unit and easily accessible. Ensure the power supply lead cannot be walked on or damaged by items placed on or against it. Do not use if the power supply lead is damaged. Using the device with a damaged power supply lead may expose you to electric shock or other hazards. Check the condition of the power supply lead regularly. Contact your dealer or service centre immediately for a replacement if damaged.

Keep Away From Harmful Substances

To prevent the risk of electric shock and fire, do not expose this device to rain, humidity or intense heat sources (such as radiators or direct sunlight). Avoid using this equipment in environments where there is excessive heat, dust, moisture, chemicals, vibration or mechanical shocks.

Slots and Openings. These are designed into the device for ventilation and to avoid overheating. Always ensure these openings remain clear. Do not attempt to insert anything into these openings under any circumstances. If liquids have been spilled on, or objects have fallen into the product it must be checked by a qualified technician before re-using.

Connections. All inputs and outputs (except for power input) are TBTS defined under EN60950.

- DO NOT OPEN SYSTEM DUE TO HIGH VOLTAGE.
- DO NOT IMMERSE IN WATER.

If you have any queries regarding these safety instructions or how to maintain the unit please do not hesitate to contact us on:

+44 (0) 870 770 8088

Servicing. Do not attempt to service this product yourself. Opening or removing covers and screws may expose you to electric shocks or other hazards. Refer all servicing to qualified service personnel.

Note: Additional remote displays can be added to the system using standard mic cable splitters but the sum of the total distance between all displays and the main unit should not exceed 100m (300').

Apply power to the main unit using the universal IEC power connector input on the side of the main unit. The LCD display on the main unit will illuminate showing the software version and then the main menu options.

The remote displays will remain off until the system has been taken out of the power-up default pause mode and either a profile has been started or the clock mode has been selected.

Programming a Timer Profile

(refer p6-7 for the Operation and Programming Diagram)

1. From the Main Menu, move the cursor to the 'Menu' option using the T1 keys on the keypad and then select it using the ← key.
2. Select the 'Select Profile' option using the ← key.
3. Using the T1 keys, scroll through the profiles you wish to run or edit (1-8) then confirm using the ← key.
4. You can now return to the main menu to run this profile using the ← key again, or choose the 'Edit' menu using the ↓ key and then the ← key.
5. In the 'Edit Menu' you can select either count 'Up' or count 'Down' mode using the T1 keys and then confirm using the ← key.
6. You can now program in hours and minutes the total time of the profile (count down mode only), the time at which the colour changes to amber and the time at which the colour changes to red using the T1 and ← keys.
7. Upon confirming the red minutes time setting you are returned to the profile select menu. You can now return to the main menu to run this profile using the ← key again, or choose the 'Edit' menu using the ↓ key and then the ← key to program or edit further profiles.

Running a Timer Profile

(refer p6-7 for the Operation and Programming Diagram)

1. Firstly select the profile you wish to run using steps 1-4 in the 'Programming a Timer Profile' instructions.
2. Once back at the Main Menu, ensure the system is not paused (see 4 below) then simply press the ← key to start the profile. The remote displays will illuminate and commence displaying the programmed colours and times.